

08-17-00

A

jc883 U.S. PRO
08/16/00

Practitioner's Docket No. GR 97 P 2065 D

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

jc896 U.S. PRO
09/639962
08/16/00

Box Patent Application
Assistant Commissioner for Patents
Washington, D.C. 20231

DIVISIONAL APPLICATION TRANSMITTAL

Transmitted herewith for filing is the patent application of
Inventors:

WILHELM FRANK et al.

For (title):

PIEZOELECTRIC ASSEMBLY

1. Type of Application

This new application is for a

- ☒ Divisional.
☐ Continuation.
☐ Continuation-in-part (C-I-P).

2. Benefit of Prior U.S. Application(s) (35 U.S.C. 119(e), 120, or 121)

- ☒ The new application being transmitted claims the benefit of prior U.S. application.
Enclosed are ADDED PAGES FOR NEW APPLICATION TRANSMITTAL
WHERE BENEFIT OF PRIOR U.S. APPLICATION(S) CLAIMED.

3. Papers Enclosed

A. Required for Filing Date under 37 C.F.R. 1.53(b)

- 17 Pages of Specification
2 Pages of Claims
6 Sheets of Drawing
☒ Formal
☐ Informal

09/639962 "08/16/00

B. Other Papers Enclosed

 1 Page of Abstract
 Other

4. Additional Papers Enclosed

- ☐ Preliminary Amendment
- ☒ Information Disclosure Statement (37 C.F.R. 1.98)
- ☒ Form PTO-1449 (PTO/SB/08A and 08B)
- ☐ Citations
- ☐ Declaration of Biological Deposit
- ☐ Submission of "Sequence Listing," computer readable copy and/or amendment pertaining thereto for biotechnology invention containing nucleotide and/or amino acid sequence.
- ☐ Authorization of Attorney(s) to Accept and Follow Instructions from Representative
- ☐ Special Comments
- ☐ Other

5. Declaration or Oath

- ☒ Enclosed
- Executed by
- ☒ inventors.

6. Inventorship Statement

The inventorship for all the claims in this application are:

- ☒ The same.

7. Language

- ☒ English

8. Assignment

- ☒ An assignment of the invention to Siemens Aktiengesellschaft
- ☒ will follow.

9. **Certified Copy**

Certified copies of applications

GERMANY	197 33 858.5	August 5, 1997
Country	Application No.	Filed

from which priority is claimed

☐ is (are) attached.

☒ will follow.

☐ was filed in parent application No.

11. **Fee Payment Being Made at This Time**

☒ Enclosed

<input checked="" type="checkbox"/> Filing fee	\$ 690.00
Total Fees Enclosed	\$ 690.00

12. **Method of Payment of Fees**

☒ Check in the amount of \$ 690.00.

15. **Authorization to Charge Additional Fees**

☒ The Commissioner is hereby authorized to charge the following additional fees by this paper and during the entire pendency of this application to Account No. 12-1099.

☒ 37 C.F.R. 1.16(a), (f) or (g) (filing fees)

☒ 37 C.F.R. 1.16(b), (c) and (d) (presentation of extra claims)

☒ 37 C.F.R. 1.16(e) (surcharge for filing the basic filing fee and/or declaration on a date later than the filing date of the application)

☒ 37 CFR 1.17(a)(1)-(5) (extension fees pursuant to § 1.136(a)).

☒ 37 C.F.R. 1.17 (application processing fees)

☐ 37 C.F.R. 1.18 (issue fee at or before mailing of Notice of Allowance, pursuant to 37 C.F.R. 1.311(b))

16. Instructions as to Overpayment

☒ Credit Account No. 12-1099.

☐ Refund



SIGNATURE OF PRACTITIONER

WERNER H. STEMER
REG. NO. 34,956

Tel. No.: (954) 925-1100

Fax No.: (954) 925-1101

P.O. Box 2480, Hollywood, FL 33022


P.O. Address

/bb

"Express Mail" mailing label number EL608558202US

Date of Deposit: August 16, 2000

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231.



MICHAEL J. BURNS

[x] Incorporation by reference of added pages

(check the following item if the application in this transmittal claims the benefit of prior U.S. application(s) (including an international application entering the U.S. stage as a continuation, divisional or C-I-P application) and complete and attach the ADDED PAGES FOR NEW APPLICATION TRANSMITTAL WHERE BENEFIT OF PRIOR U.S. APPLICATION(S) CLAIMED)

[x] Plus Added Pages for New Application Transmittal Where Benefit of Prior U.S. Application(s) Claimed

Number of pages added 1

[x] Plus Added Pages for Papers Referred to in Item 4 Above

Number of pages added 3

[] Plus added pages deleting names of inventor(s) named on prior application(s) who is/are no longer inventor(s) of the subject matter claimed in this application.

Number of pages added _____

[] Plus "Assignment Cover Letter Accompanying New Application"

Number of pages added _____

[] Statement Where No Further Pages Added

(if no further pages form a part of this Transmittal, then end this Transmittal with this page and check the following item)

[] This transmittal ends with this page.

ADDED PAGE FOR SPECIAL COMMENTS FOR NEW APPLICATION TRANSMITTAL

This divisional application claims the benefit under 35 U.S.C. § 120 of U.S. application No. 09/499,853, filed February 7, 2000

PIEZOELECTRIC ASSEMBLY

Cross-Reference to Related Application:

5 This is a division of U.S. application No. 09/499,853, filed February 7, 2000, which was a continuation of copending International Application No. PCT/DE98/02061, filed July 22, 1998, which designated the United States.

10 Background of the Invention:

Field of the Invention:

15 The invention relates to a piezoelectric assembly including a piezoelectric actuator prestressed and inserted into an elastic hollow body in an extension direction between a top and a bottom cover plate connected to the hollow body.

Piezoelectric actuators are used, for example, in motor-vehicle technology to control an injection valve of an internal combustion engine. German Published, Non-Prosecuted Patent Application DE 196 53 555 A1 describes a piezoelectric 20 actuator which is preloaded by a spring device against a cover plate of a housing. The cover plate is screwed through the use of a screw joint to the housing, in which the spring device and the piezoelectric actuator are situated.

German Patent DE 38 44 134 C2 has disclosed an injection valve which has a piezoelectric actuator as a final control element. The actuator is inserted into a hollow-cylindrical spring and is preloaded against a housing of the injection valve by the spring. The injection valve has a complex construction and, moreover, the preloading of the actuator is dependent on manufacturing tolerances of the housing.

Summary of the Invention:

It is accordingly an object of the invention to provide a piezoelectric assembly, which overcomes the hereinafore-mentioned disadvantages of the heretofore-known devices and methods of this general type, in which the assembly has a simple construction and is optimized in terms of installation space.

With the foregoing and other objects in view there is provided, in accordance with the invention, a piezoelectric assembly, comprising an elastic hollow body; a top cover plate connected to the hollow body by one of welding and flanging, and a bottom cover plate connected to the hollow body; and a piezoelectric actuator having an extension direction, the actuator inserted into the hollow body in the extension direction between the cover plates for prestressing the actuator.

In accordance with another feature of the invention, the hollow body has a given length, two butting edges and at least one connecting seam connecting the two butting edges to one another and extending entirely over the given length.

5

In accordance with a further feature of the invention, the hollow body has a longitudinal direction and two butting edges associated with one another and disposed in the longitudinal direction, the butting edges not being connected to one another.

10

In accordance with an added feature of the invention, the hollow body has apertures at least partially determining an elasticity of the hollow body.

15

In accordance with an additional feature of the invention, the hollow body is made of at least one plate formed into the hollow body and then fixed by at least one connecting seam.

20 With the objects of the invention in view, there is also provided a method for producing a piezoelectric structural unit, which comprises inserting a front end of a piezoelectric actuator into a hollow body; force-lockingly or form-lockingly connecting the inserted front end of the actuator to the
25 hollow body; pressing the actuator into the hollow body with a defined force establishing a prestress of the actuator; and

force-lockingly or form-lockingly connecting the actuator to the hollow body in the vicinity of a rear end of the actuator, for fixing the prestress of the actuator.

5 In accordance with another mode of the invention, there is provided a method which comprises force-lockingly or form-lockingly connecting an open end of the hollow body to a first cover plate for closing the open end, before the step of inserting the actuator; placing a second top plate on the
10 inserted actuator and pressing the second top plate into the hollow body with a given force; and force-lockingly or form-lockingly connecting the second cover plate to the hollow body while maintaining the given force, for permanently prestressing the actuator with the hollow body.

15 In accordance with a further mode of the invention, there is provided a method which comprises elastically elongating the hollow body during the prestressing of the actuator with the given force.

20

With the objects of the invention in view, there is additionally provided a method for the production of a hollow body, which comprises producing a plate with a defined area; forming apertures in the plate for affecting an elasticity of
25 the plate; forming the plate into a hollow body to be used to

prestress a piezoelectric actuator; and fixing a shape of the formed plate.

In accordance with a concomitant mode of the invention, there
5 is provided a method which comprises at least partially compacting an edge bounding at least one of the apertures.

A significant advantage of the invention is that the piezoelectric actuator is surrounded by a hollow body, and the
10 hollow body forms a single structural unit with the prestressed piezoelectric actuator. The prestress of the actuator is permanently fixed during the production of the structural unit. The actuator thus does not need to be prestressed again every time it is removed and installed. The
15 structural unit is therefore easy to install, requires little maintenance and is economical in terms of cost. Other features which are considered as characteristic for the invention are set forth in the appended claims.

20 Although the invention is illustrated and described herein as embodied in a piezoelectric assembly, it is nevertheless not intended to be limited to the details shown, since various modifications and structural changes may be made therein without departing from the spirit of the invention and within
25 the scope and range of equivalents of the claims.

The construction and method of operation of the invention,
however, together with additional objects and advantages
thereof will be best understood from the following description
of specific embodiments when read in connection with the
5 accompanying drawings.

Brief Description of the Drawings:

Fig. 1 is a diagrammatic, sectional view of a first embodiment
of a prestressed piezoelectric actuator;

10 Fig. 2 is a sectional view of a second embodiment of the
piezoelectric actuator;

15 Fig. 3 is an elevational view of a sleeve with transverse
slots;

Fig. 4 is an elevational view of a sleeve with oblique slots;

20 Fig. 5 is an elevational view of a sleeve with one oblique
aperture;

Fig. 6 is an elevational view of a sleeve with a plurality of
oblique apertures;

25 Fig. 7 is an elevational view of a sleeve with round
apertures;

Fig. 8 is an elevational view of a sleeve with an oblique connecting seam;

Fig. 9 is an elevational view of a sleeve with a wavy connecting seam;

Fig. 10 is an elevational view of a sleeve with a straight connecting seam;

Fig. 11 is an elevational view of a sleeve with a crisscross connecting seam;

Fig. 12 is a partly sectional view of an assembly apparatus for producing a prestressed actuator; and

Fig. 13 is a view similar to Fig. 12 of another assembly apparatus for prestressing an actuator.

Description of the Preferred Embodiments:

Referring now to the figures of the drawings in detail and first, particularly, to Fig. 1 thereof, there is seen a piezoelectric actuator 1 which includes a plurality of individual piezoelectric elements stacked one upon the other. The piezoelectric actuator 1 is introduced into a hollow body, mould, shape or form 2. The hollow body or mould 2 is, for example, a sleeve with an annular cross section or a

rectangular-section tube profile. The hollow body or mould 2 is preferably matched in shape to the shape of the piezoelectric actuator 1. A bottom end of the piezoelectric actuator 1 rests on a bottom cover plate 4, which is force-lockingly and/or form-lockingly connected to the hollow body or mould 2. In this illustrative embodiment, the bottom cover plate 4 is form-lockingly connected to the hollow body or mould 2 by a weld 5. A form-locking connection is one which connects two elements together due to the shape of the elements themselves, as opposed to a force-locking connection, which locks the elements together by force external to the elements.

A top end of the piezoelectric actuator 1 rests against an upper cover plate 3, which is likewise form-lockingly and/or force-lockingly connected to the hollow body or mould 2. In this illustrative embodiment, the top cover plate 3 is form-lockingly connected to the hollow body or mould 2 by a weld 5.

The top cover plate 3 has passages 7 through which contact pins 6 of the piezoelectric actuator are passed. The contact pins 6 are used to make the piezoelectric actuator capable of being activated for extension or expansion. The piezoelectric actuator 1 is prestressed with a defined force by the hollow body or mould 2 and the bottom and top cover plates 3, 4 so as to resist deflection. In order to achieve this, the hollow

body or mould 2 is manufactured from a correspondingly elastic material. Preferred materials are those with a low modulus of elasticity, such as a copper-beryllium alloy (CuBe_2) and/or those with a high strength characteristic, such as spring steel.

A further improvement in the elastic properties of the hollow body or mould 2 is achieved by making apertures in the hollow body or mould 2. Different shapes of the apertures are illustrated in greater detail in Figs. 3 to 7.

Fig. 2 shows a prestressed piezoelectric actuator 1 which, as in Fig. 1, is clamped between a top cover plate and a bottom cover plate 3, 4 by a hollow body or mould 2. In this example, the connection between the hollow body or mould 2 and the top and bottom cover plates 3, 4 is effected through the use of flanges 8. For this purpose, the top and bottom cover plates 3, 4 preferably have recesses 26 into which respective flanged top and bottom edge regions of the hollow body or mould 2 engage. In a simple embodiment, no recesses 26 are provided and the top and bottom edge regions are simply flanged around the top and bottom edges of the top and bottom cover plates 3, 4.

A significant advantage of the structural units illustrated in Fig. 1 and Fig. 2, which are constructed of the top and bottom

cover plates 3, 4, the hollow body or mould 2 and the piezoelectric actuator 1, is that the prestress of the piezoelectric actuator is permanently fixed through the use of the fixed connection to the hollow body or mould 2. This means that there is no need for readjustment during the entire service life of the actuator.

The piezoelectric actuator 1, the hollow body or mould 2 and the top and bottom cover plates 3, 4 form a compact structural unit which can be transported without problems and can be installed in a corresponding final control element, in particular an injection valve, in a simple operation. The structural unit 1, 2, 3, 4 can be removed from the final control element without any change in the prestress of the piezoelectric actuator 1. In addition, the structural unit can be manufactured at relatively reasonable cost.

Fig. 3 shows a hollow body or mould 2 that forms a cylindrical sleeve in which transverse slots 10 are made perpendicularly to the longitudinal axis. The number and length of the transverse slots 10 are such that the elasticity of the hollow body or mould 2 is matched to the desired manner of operation of the prestressed piezoelectric actuator according to Figs. 1 and 2.

Fig. 4 shows a hollow body or mould 2 that forms a cylindrical sleeve in which oblique slots 11 are made obliquely to the longitudinal axis of the hollow body or mould 2.

5 Fig. 5 shows a hollow body or mould 2 that forms a cylindrical sleeve in which an oblique aperture 12 running in a spiral around the hollow body or mould 2 is made. In this case, at least part of the hollow body or mould 2 is in the form of a cylindrical spiral.

10 Fig. 6 shows a hollow body or mould 2 that forms a cylindrical sleeve in which a plurality of slots 13 disposed parallel to one another and in a spiral relative to the longitudinal axis of the hollow body or mould 2 are made. Due to the slots 13,
15 at least part of the hollow body or mould 2 forms a plurality of cylindrical spring elements in the form of spirals.

Fig. 7 shows a hollow body or mould 2 that is constructed as a cylindrical sleeve in which circular apertures 14 are made.

20

The number and geometry of the apertures and slots in Figs. 3 to 7 are chosen in such a way that the elasticity of the hollow body or mould 2 in the longitudinal direction, i.e. parallel to the direction of deflection of the piezoelectric
25 actuator 1, is matched to the desired manner of operation of the piezoelectric actuator 1.

The hollow body or moulds 2 illustrated in Figs. 3 to 7 are preferably constructed as thin-walled hollow body or moulds which are produced from a simple, thin-walled and preferably drawn tube.

5

An advantageous method for producing the hollow body 2 includes making apertures and/or slots in a plate of defined thickness and defined dimensions in a first operation. The shape of the plate offers the advantage of making the plate readily accessible for the introduction of the apertures, and the apertures can be made in a wide variety of geometries, numbers and configurations, for example by inexpensive punching.

10

15

An edge region of an aperture is preferably slightly plastically deformed, resulting in hardening of the plate due to an introduced internal compressive stress. A corresponding hardening can also be achieved, for example, by shot peening the edge regions of the aperture.

20

This has a highly strength-enhancing effect, particularly in the case of dynamic loading of the hollow body or mould 2.

This is achieved, for example, if the punch with which the apertures are made in the plate is widened to a larger cross

25

section, after the punching cross section, as seen in the direction of punching. As a result, the desired aperture is

punched out of the plate first and then the edge region of the aperture is compacted. This introduces an internal compressive stress into the edge region of the aperture which results in good fatigue strength. During this process, the thickness of the edge is preferably increased. The edge may be bent slightly out of the plane of the plate, depending on the type of working. This can, for example, be an indication of compaction of the edge.

10 The plate is then formed to provide the desired hollow body or mould 2 and fixed in the hollow body or mould 2 through the use of a weld. A seam which is formed in this process is preferably welded with a laser. Non-uniformities in the weld are eliminated by a heat treatment.

15 As an alternative, it is also possible for the tubular shape to be fixed by connecting the hollow body or mould 2 to the top and bottom cover plates 3, 4. In this case, butting edges, which are usually welded, are not connected to one another. The butting edges illustrated in Figs. 8 to 11, which form seams 15, 17, 16, 18, are thus not connected to one another in this illustrative embodiment. An advantageous distribution of the spring and pressure forces is thereby achieved.

009790-031500
09639962-09669960

Figs. 8 to 11 show various forms of seams 15, 16, 17, 18 which connect two butting edges of a formed plate and thus fix the hollow body or mould 2. Fig. 8 shows an oblique seam 15 disposed obliquely to the longitudinal axis of the sleeve shape 2. Fig. 9 shows a wavy seam 17, which is disposed symmetrically with respect to the longitudinal direction of the hollow body or mould 2 and is disposed in the form of a sine wave parallel to the longitudinal direction of the sleeve shape 2. Fig. 10 shows a longitudinal seam 16 disposed parallel to the longitudinal direction of the hollow body or mould 2. Fig. 11 shows a crisscross seam 18 disposed symmetrically with respect to the longitudinal axis of the hollow body or mould 2. The crisscross seam 18 is disposed in the form of a zigzag line in the longitudinal direction relative to the hollow body or mould 2. The seams 15, 16, 17, 18 are preferably welded.

The spring rate of the hollow body or mould 2 can be adjusted within wide limits through the use of the following

parameters: inside and outside diameter of the sleeve mould, wall thickness, material with suitable modulus of elasticity, number of apertures, geometry of the apertures (holes, grooves, spiral grooves, etc.), and configuration of the apertures (horizontally, vertically, obliquely and, in the case of spiral grooves: slope, number of flights, groove width, etc.).

The apertures are, for example, made by drilling, punching, milling, erosion or electrochemical methods.

Fig. 12 shows an assembly configuration through the use of which a piezoelectric actuator 1 is installed in a sleeve-shaped hollow body or mould 2 with a precisely defined force. For this purpose, one end of the hollow body or mould 2 is form-lockingly and/or force-lockingly connected to a top cover plate 3 having passages 7. The hollow body or mould 2 has a bearing edge 24 which points radially outward at another end. The hollow body or mould 2 is inserted, top cover plate 3 first, into an assembly fixture 20. The assembly fixture 20 has an assembly recess 21 which matches the cross section of the hollow body or mould 2 in such a way that the hollow body or mould 2 can be inserted into the assembly recess 21 with the bearing edge 24 supported in a bearing region 27 of the assembly fixture 20. A piezoelectric actuator 1 is then inserted, contact pins 6 at a front end first, into the hollow body or mould 2. A bottom cover plate 4 is then inserted into the hollow body or mould 2 and pressed into the hollow body or mould 2 with a defined force by an assembly device 23 using a punch 22, so that the hollow body or mould 2 is thereby elongated elastically.

The defined force corresponds to the desired prestress of the piezoelectric actuator 1. While maintaining the force, the

bottom cover plate 4 is then force-lockingly and/or form-lockingly connected to the hollow body or mould 2, preferably by being welded to it. This connects the actuator to the hollow body in the vicinity of the rear end of the actuator and fixes the prestress of the piezoelectric actuator 1.

Fig. 13 shows a second variant of the assembly configuration. In contrast to the configuration in Fig. 12, the hollow body or mould 2 remains unloaded during assembly, and the bent-over bearing edge 27 shown in Fig. 12 can be omitted. For this purpose, one end of the hollow body or mould is form-lockingly and/or force-lockingly connected to the top cover plate 3 having the passages 7, the piezoelectric actuator 1 is introduced into the hollow body or mould 2 and, as shown in Fig. 13, inserted with the contact pins of the piezoelectric actuator 1 entering into depressions that are provided for this purpose in a baseplate 19. The bottom cover plate 4 is then placed on the actuator 1, pressed into the hollow body or mould through the use of a punch 22 of an assembly fixture 20, and then form-lockingly and/or force-lockingly connected to this hollow body or mould, preferably by being welded to it. The force which is used for pressing in compresses only the piezoelectric actuator 1 and the cover plates 3, 4. After the relief of the load on the assembly fixture 20, the actuator 1 expands and, in the process, stresses the hollow body or mould 2. The force used for pressing in must be calculated, while

taking the stiffnesses of the actuator 1 and the hollow body or mould 2 into account, in such a way that a defined prestressing force is established after the relief of the load on the system.

5

Length tolerances of the piezoelectric actuator 1 which are inherent in production can preferably be compensated for by grinding the bottom cover plate 4. Grinding can furthermore be employed to correct any deviation from parallelism of the end surfaces of the piezoelectric actuator 1. For this purpose, the bottom cover plate 4 should be ground at a corresponding angle.

10

We claim:

1. A piezoelectric assembly, comprising:

an elastic hollow body;

a top cover plate connected to said hollow body by one of welding and flanging, and a bottom cover plate connected to said hollow body; and

a piezoelectric actuator having an extension direction, said actuator inserted into said hollow body in said extension direction between said cover plates for prestressing said actuator.

2. The piezoelectric assembly according to claim 1, wherein said hollow body has a given length, two butting edges and at least one connecting seam connecting said two butting edges to one another and extending entirely over said given length.

3. The piezoelectric assembly according to claim 1, wherein said hollow body has a longitudinal direction and two butting edges associated with one another and disposed in said longitudinal direction, said butting edges not being connected to one another.

4. The piezoelectric assembly according to claim 1, wherein said hollow body has apertures at least partially determining an elasticity of said hollow body.

5. The piezoelectric assembly according to claim 1, wherein said hollow body is made of at least one plate formed into said hollow body and then fixed by at least one connecting seam.

Abstract of the Disclosure:

A piezoelectric assembly, a method for producing a structural unit with a prestressed piezoelectric actuator and a method
5 for producing a hollow body for prestressing the piezoelectric actuator include an actuator pushed into a spring sleeve and force-lockingly and/or form-lockingly connected under prestress to two ends of the spring sleeve. This provides a structural unit in which the prestressing force of the
10 piezoelectric actuator is permanently fixed by the production process.

FIG 1

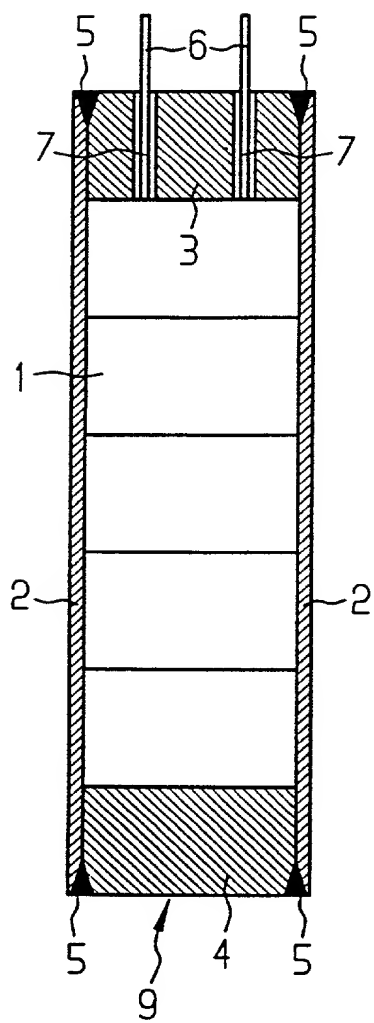


FIG 2

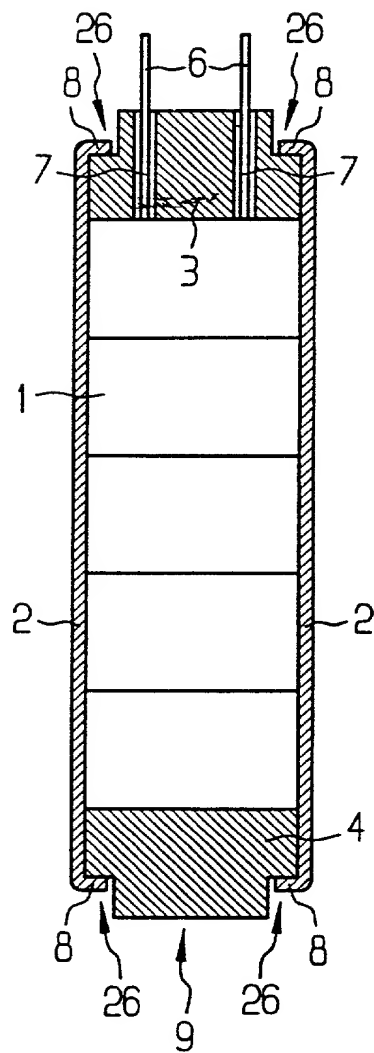


FIG 7

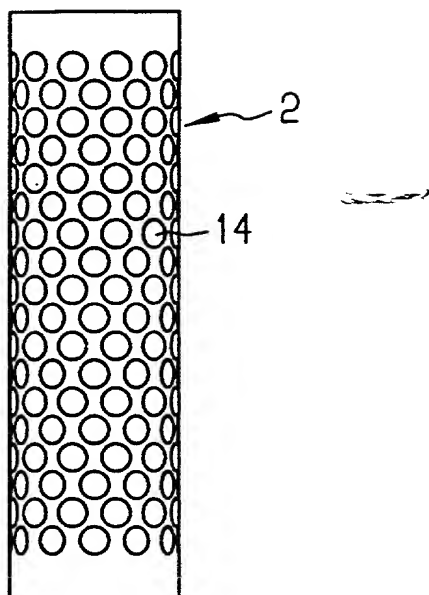


FIG 8

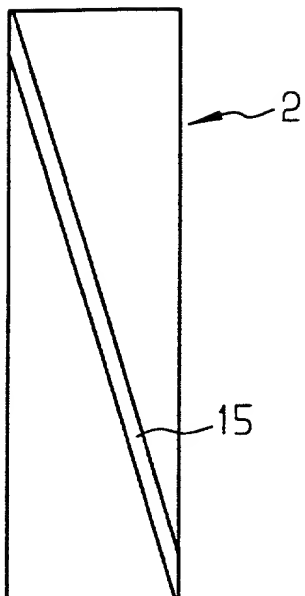


FIG 10

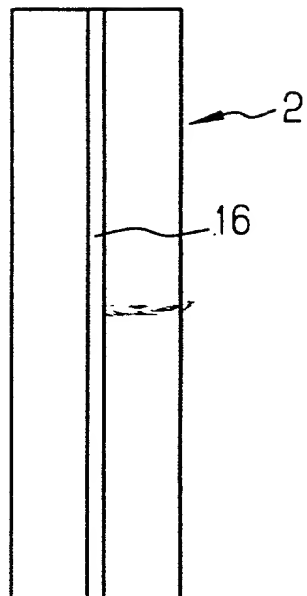


FIG 9



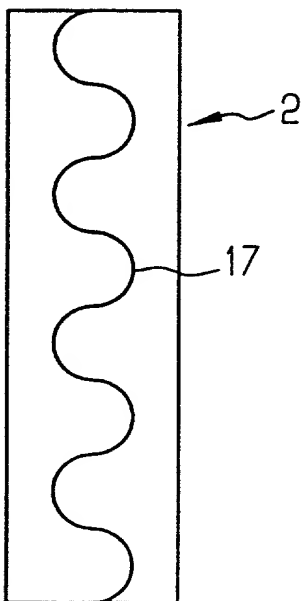



FIG 11

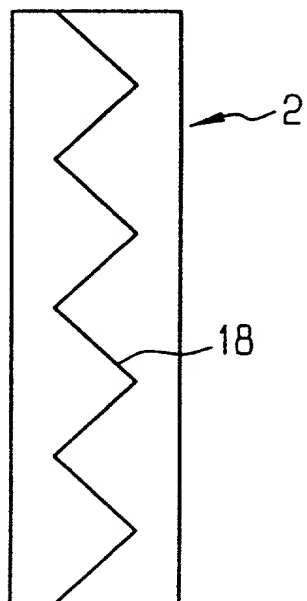

5/6

FIG 12

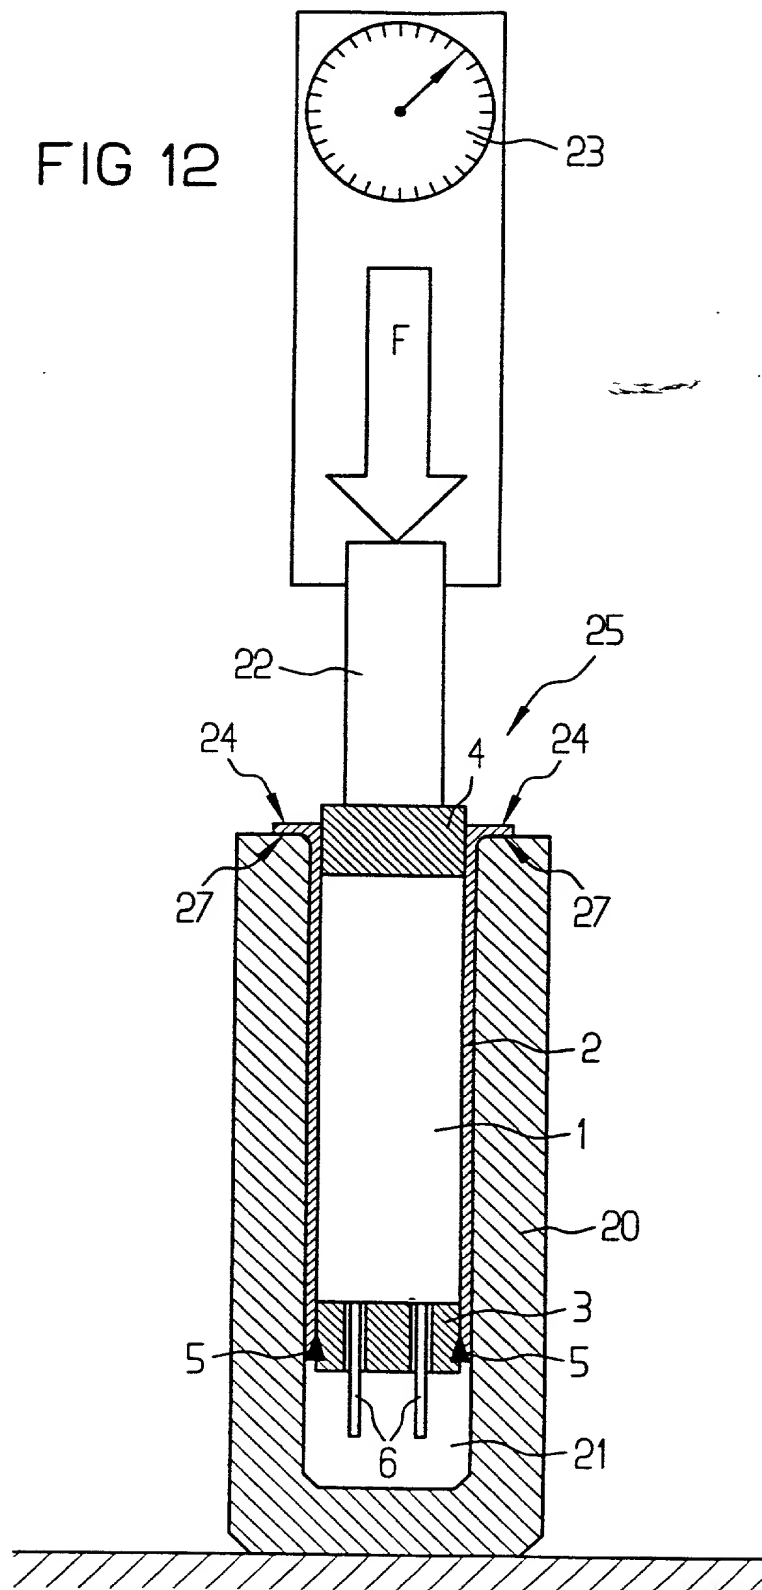

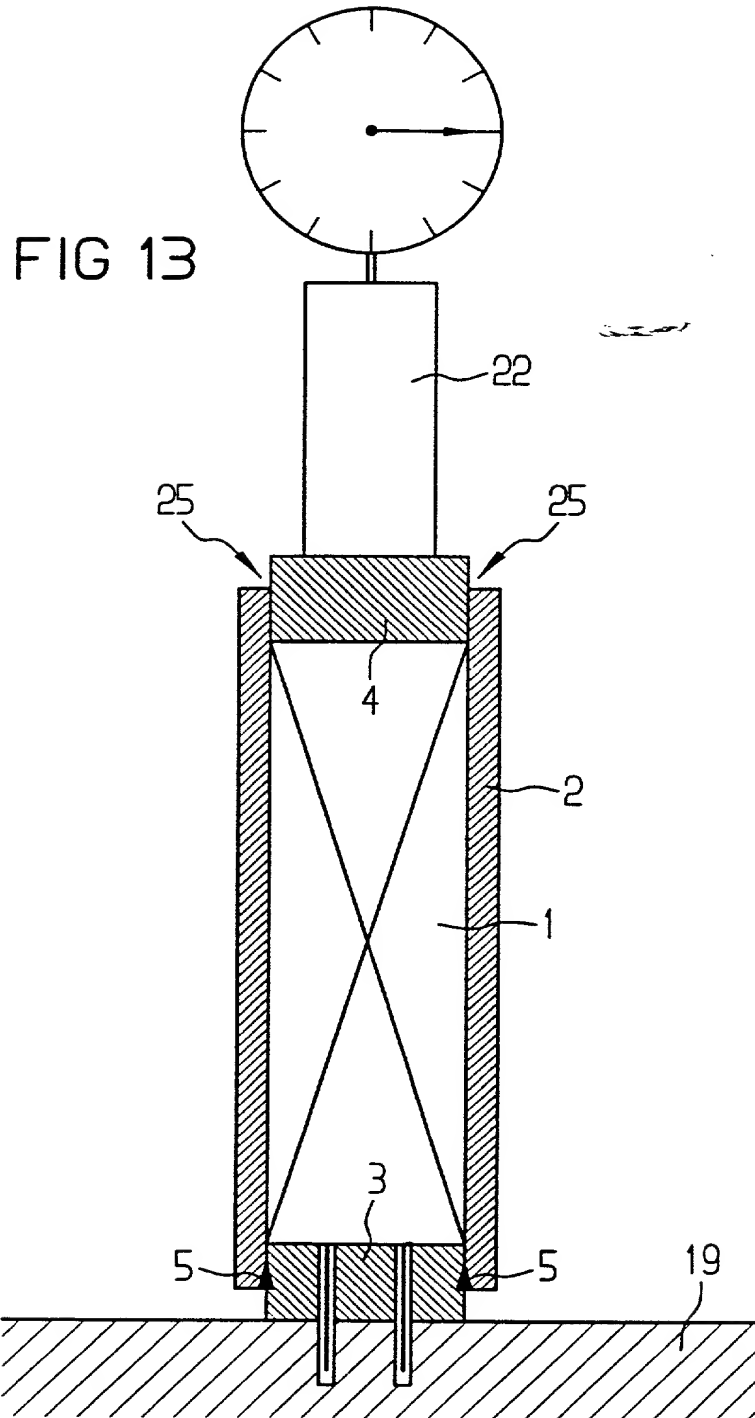

Docket No.: GR 97 P 2065

COMBINED DECLARATION AND POWER OF ATTORNEY
IN ORIGINAL APPLICATION

As a below named inventor, I hereby declare that: my residence, post office address and citizenship are as stated below next to my name; that I verily believe that I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

PIEZOELECTRIC ASSEMBLY, METHOD FOR PRODUCING A
STRUCTURAL UNIT WITH A PRESTRESSED PIEZOELECTRIC
ACTUATOR AND METHOD FOR PRODUCING A HOLLOW BODY
FOR PRESTRESSING THE PIEZOELECTRIC ACTUATOR

described and claimed in the specification bearing that title, that I understand the content of the specification, that I do not know and do not believe the same was ever known or used in the United States of America before my or our invention thereof, or patented or described in any printed publication in any country before my or our invention thereof or more than one year prior to this application, that the same was not in public use or on sale in the United States of America more than one year prior to this application, that the invention has not been patented or made the subject of an inventor's certificate issued before the date of this application in any country foreign to the United States of America on an application filed by me or my legal representatives or assigns more than twelve month prior to this application, that I acknowledge my duty to disclose information of which I am aware which is material to the examination of this application under 37 C.F.R. 1.56a, and that no application for patent or inventor's certificate of this invention has been filed earlier than the following in any country foreign to the United States prior to this application by me or my legal representatives or assigns:

German Application No. 197 33 858.5, filed August 5, 1997, the International Priority of which is claimed under 35 U.S.C. §119; and International Application No. PCT/DE98/02061, filed July 22, 1998, the Priority of which is claimed under 35 U.S.C. §120.

I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

HERBERT L. LERNER (Reg.No.20,435)
LAURENCE A. GREENBERG (Reg.No.29,308)
WERNER H. STEMER (Reg.No.34,956)
RALPH E. LOCHER (Reg.No. 41,947)

009789 29665960

Address all correspondence and telephone calls to:

LERNER AND GREENBERG, P.A.
POST OFFICE BOX 2480
HOLLYWOOD, FLORIDA 33022-2480
Tel: (954) 925-1100 - Fax: (954) 925-1101

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

FULL NAME OF FIRST JOINT INVENTOR: WILHELM FRANK

INVENTOR'S SIGNATURE: Wilhelm Frank

DATE: 15.02.2000

Residence: BAMBERG, GERMANY

Country of Citizenship: GERMANY

Post Office Address: MEINHARDTSTRASSE 44
D-96049 BAMBERG
GERMANY

FULL NAME OF SECOND JOINT INVENTOR: GÜNTHER LEWENTZ

INVENTOR'S SIGNATURE: Günter Lewentz

DATE: 14th of February 2000

Residence: REGENSBURG, GERMANY

Country of Citizenship: GERMANY

Post Office Address: LÄRCHENWEG 5
D-93055 REGENSBURG
GERMANY

009780-2966E960

FULL NAME OF THIRD JOINT INVENTOR:

ANDREAS VOIGT

INVENTOR'S SIGNATURE: X 6.02.00

DATE: X 14.02.00

Residence: REGENSBURG, GERMANY

Country of Citizenship: GERMANY

Post Office Address: LIEBIGSTRASSE 27
D-93055 REGENSBURG
GERMANY

009780" 2966E350